


Hydraulic

DIN EN856 4SH

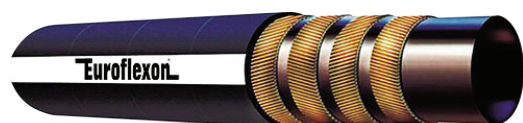

I.D.			R.O.D.		O.D.		MAX W.P.		MIN B.P.		MIN B.R.	WEIGHT
DASH	DN	INCH	MM	INCH	MM	INCH	BAR	PSI	BAR	PSI	MM	KG/M
-12	19	3/4"	28.2	1.11	31.9	1.26	420	6090	1680	24360	280	1.55
-16	25	1"	35.1	1.38	38.1	1.50	380	5510	1520	22040	340	2.00
-20	31	1 1/4"	42.2	1.66	45.0	1.77	325	4714	1300	18855	460	2.46
-24	38	1 1/2"	49.1	1.93	53.1	2.09	290	4205	1160	16820	560	3.36
-32	51	2"	63.5	2.50	67.5	2.66	250	3650	1000	15600	700	4.98

Application:
 Recommended for very high pressure hydraulic power lines

Construction:
 Inner tube : CR - Synthetic rubber
 Reinforcement : Four spiral steel wire
 Outer Cover : CR- Synthetic rubber

Temp. Range
 -40°C to 100°C
 (-40°F to 212°F)